

# Series 30276

## Threaded Gate Valve


### Features

- 200 WOG @ 350 °F
- 316 stainless steel
- Screwed bonnet
- Solid wedge disc
- Non-rising stem
- Hydrostatic shell test at 300 psi
- Hydrostatic seat test at 220 psi
- Threaded or socket weld ends



*Valves, Automation & Controls*



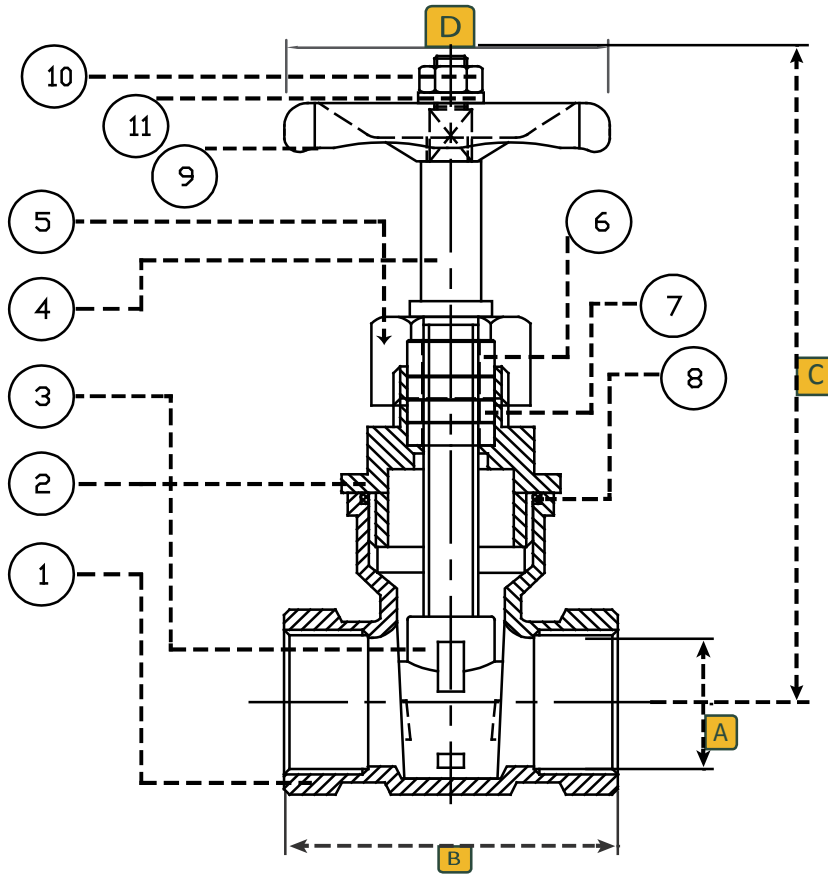

Dimensions (Inches)

Size	A	B	C	D
1/2	0.85	2.16	3.70	2.76
3/4	1.07	2.36	3.94	2.76
1	1.33	2.68	4.25	3.15
1-1/4	1.67	3.00	5.08	3.15
1-1/2	1.91	3.15	6.17	3.94
2	2.40	3.67	7.16	3.94

No.	Part Name	Qty	Material
1	Body	1	316 Stainless Steel CF8M
2	Bonnet	1	316 Stainless Steel CF8M
3	Disc	1	316 Stainless Steel CF8M
4	Stem	1	316 Stainless Steel
5	Packing Nut	1	CF8
6	Gland	1	SS 304
7	Packing	1	PTFE
8	Gasket	1	PTFE
9	Handwheel	1	ASTM B85
10	Nut	1	304 Stainless Steel
11	Washer	1	316 Stainless Steel

Technical Information & Ordering

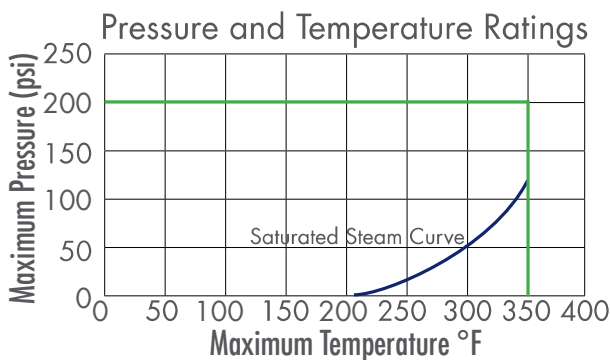


Fig: 1 - 30276 - SW  
Description: 1" - Stainless Steel Gate - Socket Weld

Size	Series	Ends	
1/2	30276	TE	Threaded Socket Weld
3/4		SW	
1			
1-1/4			
1-1/2			
2			
2-1/2			
3			

Due to continuous development of our product range, we reserve the right to change the dimensions and information for this product as required.